

Triline's new Open Rail timber sliding system is an ideal internal solution for residential and commercial applications of timber panels with face fix hangers and flat bar rail. The Open rail hangers use precision bearings with a nylon tyre.

**Triline Open Rail Timber Hardware:**

**Finish Options:** Matt Black, Stainless Steel



**Max Panel Height:** 3000mm


**Max Panel Width:** 1250mm

**Max Weight:** 100kg

**Panel Thickness:** 35-44mm

The set includes 1 flat rail, 2 hangers, doorstops, guide, brackets and fixings.

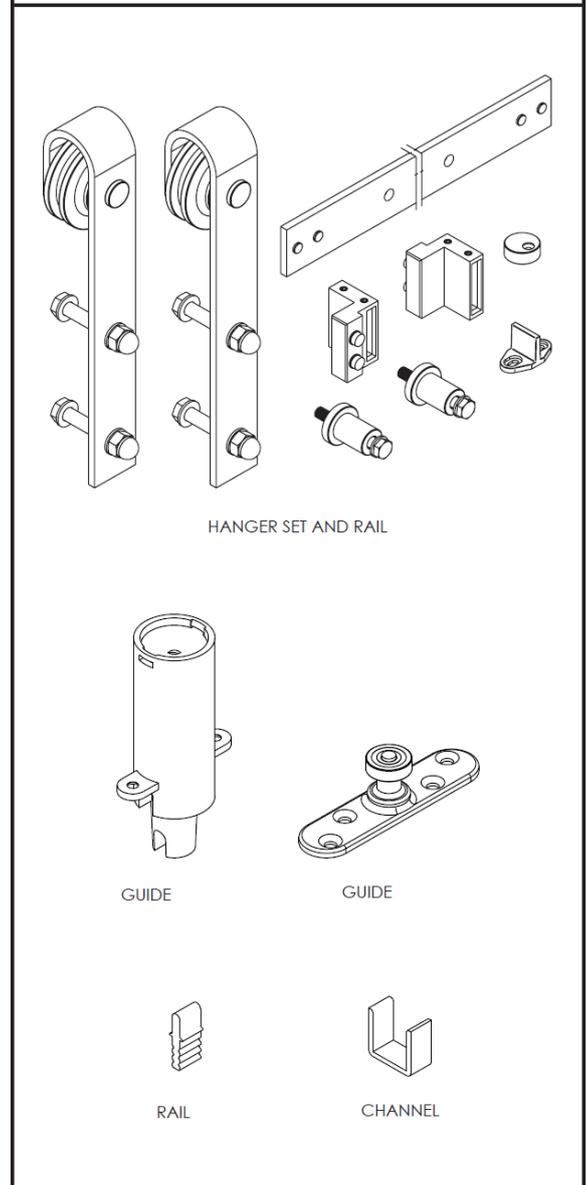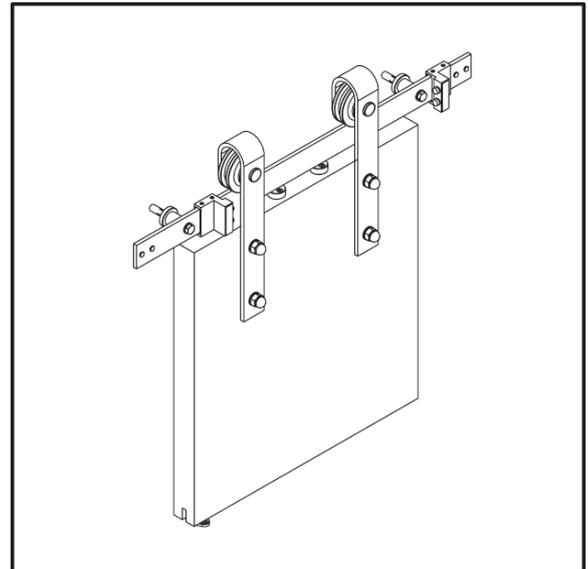


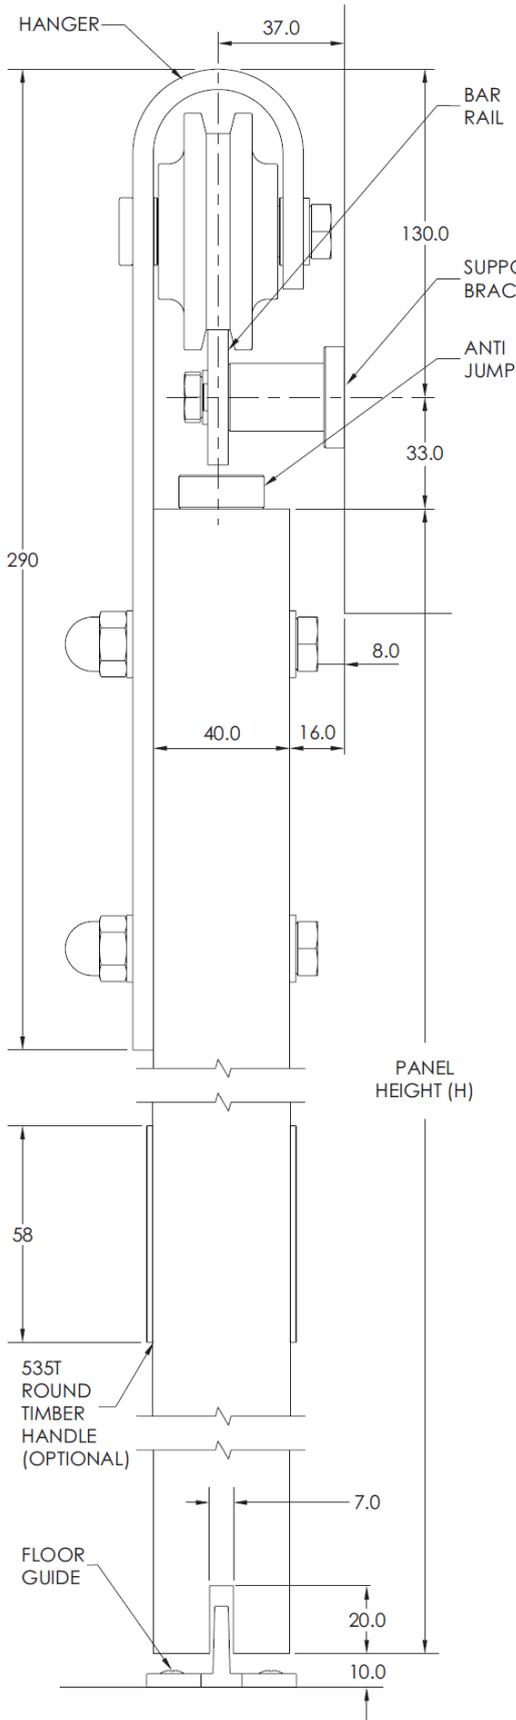

**DOOR PREPARATION**


HANGERS (INSIDE FACE OF DOOR SHOWN)

A = STANDARD NUT AND BOLT OPTION PILOT HOLE Ø10.0 X 4  
COACH SCREW PILOT HOLE Ø8.0 X 4

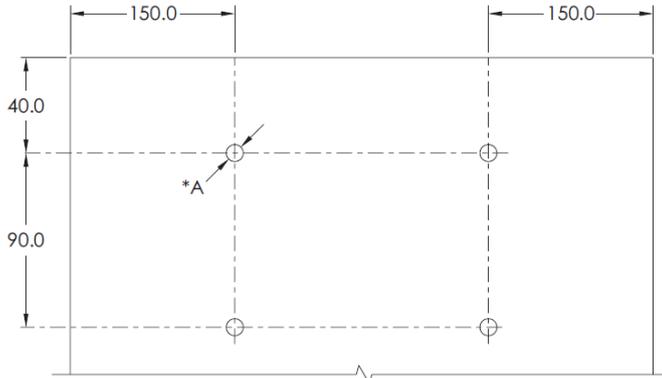

**OPTIONS**

COACH SCREW AND ROUND TIMBER HANDLE

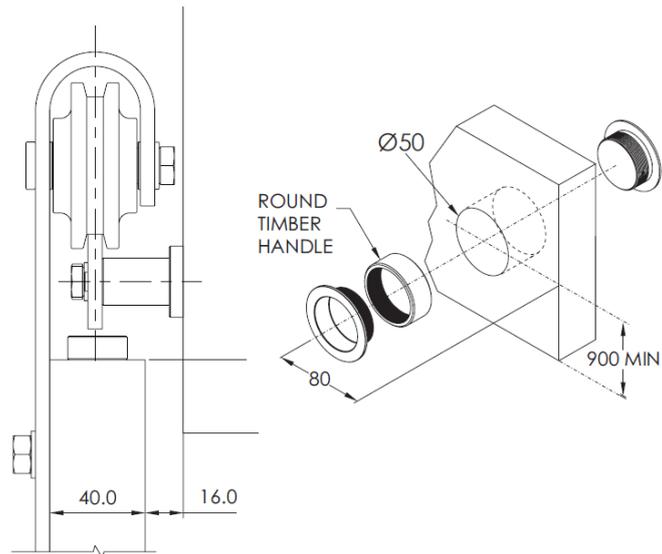

**GUIDES**

